


e@syDrive® 4638

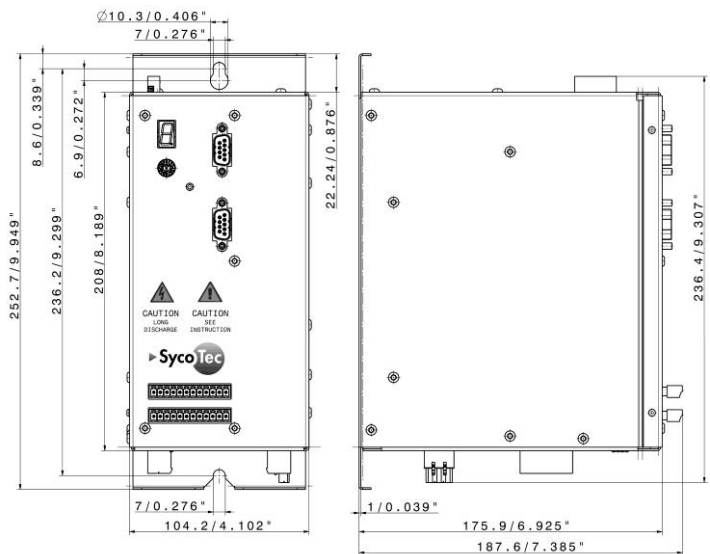

Bestell-Nr. | Part No.
4638 2001 6091
4638 mit Drossel | with choke 2002 2422

Spannungsversorgung	1 x 230 V AC (-10%/+10%) / 50/60 Hz
Ausgangsspannung	200 V AC
Ausgangsstrom	11 A (max. 20 A)
Nennausgangsleistung	3.800 VA
Ausgangsfrequenz	max. 8.000 Hz
Modulationsart	SVC, HSPAM/UF, HSBLOCK/FPAM, HSPWM
Bremswiderstand (intern)	22 Ohm / 50 W
Umgebungstemperatur	5 - 60 °C
Schutzart	IP 20
Bauform	Schaltschrankeinbau
EMV	EN 61800-3
Gewicht	3,5 kg
Versorgungsmodul	Integriert
Ausstattung	Inkl. Gegenstecker-Satz
Konfiguration	Via Computer-Interface (USB/RS232), via e@syDrive® 4638 control
Schnittstellen	5 x Digital-Ausgang 2 x Analog-Ausgang 1 x Frequenz-Ausgang 9 x Digital-Eingang 2 x Analog-Eingang 1 x CAN 2 x RS232 1 x SERVOLINK 4
DC Spindelempfehlung	4060 DC-S, 4060 DC-T, 4061 DC-S-CS-TC, 4061 DC-T, 4064 DC-HSK25, 5045 DC (alle Typen)
AC Spindelempfehlung	4060, 4060 AC-T, 4060 ER, 4060 ER-S, 4061 AC-CS-TC, 5045 AC (alle Typen), 5060, 50100 AC-duo

Änderungen vorbehalten

Input voltage	1 x 230 V AC (-10%/+10%) / 50/60 Hz
Output voltage	200 V AC
Output current	11 A (max. 20 A)
Rated output power	3,800 VA
Output frequency	max. 8,000 Hz
Modulation type	SVC, HSPAM/VF, HSBLOCK/FPAM, HSPWM
Brake resistor (internal)	22 Ohm / 50 W
Ambient temperature	5 - 60°C
Protection category	IP 20
Design	Cabinet version
EMC	EN 61800-3
Weight	3.5 kg
Power supply	Integrated
Supplement	Incl. mating connector set
Configuration	Via computer interface (USB/RS232), via e@syDrive® 4638 control
Interfaces	5 x Digital output 2 x Analogue output 1 x Frequency output 9 x Digital input 2 x Analogue input 1 x CAN 2 x RS232 1 x SERVOLINK 4
DC Spindle reference	4060 DC-S, 4060 DC-T, 4061 DC-S-CS-TC, 4061 DC-T, 4064 DC-HSK25, 5045 DC (all types)
AC Spindle reference	4060, 4060 AC-T, 4060 ER, 4060 ER-S, 4061 AC-CS-TC, 5045 AC (all types), 5060, 50100 AC-duo

Subject to change without notice